

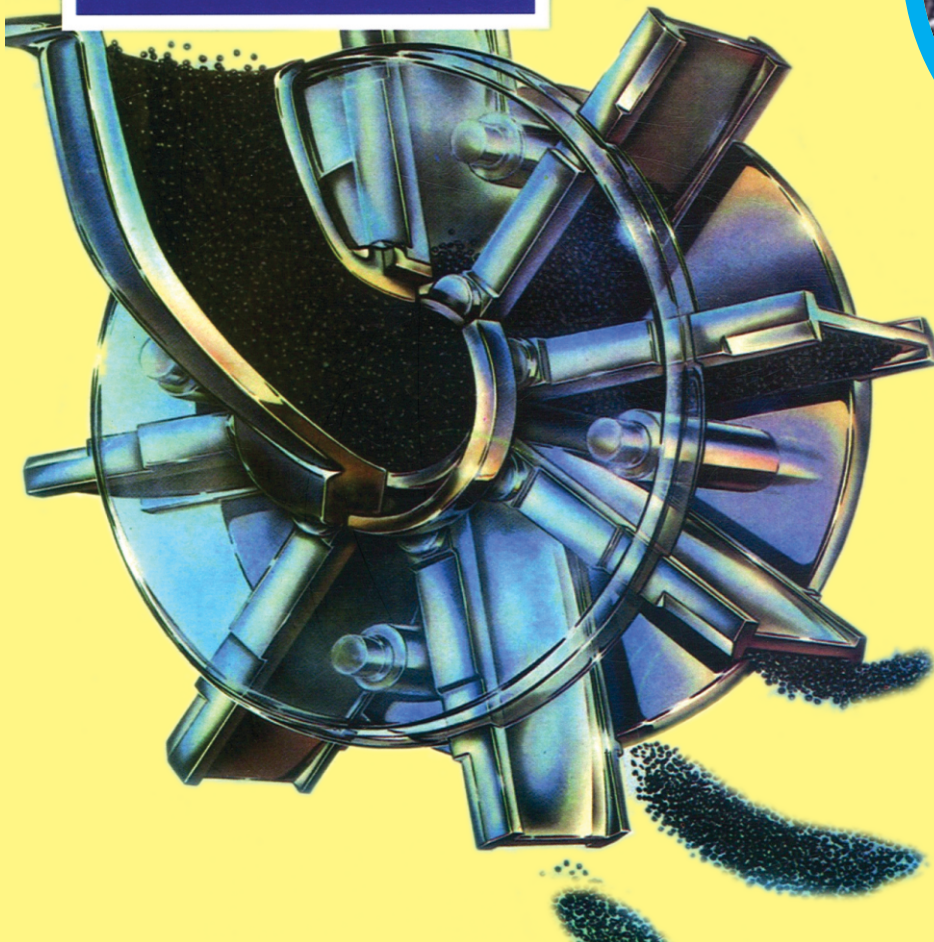
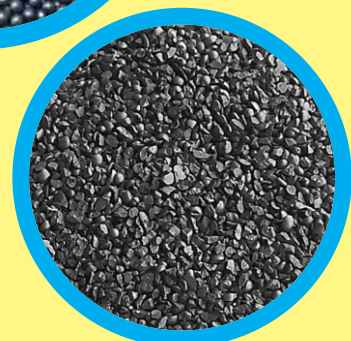


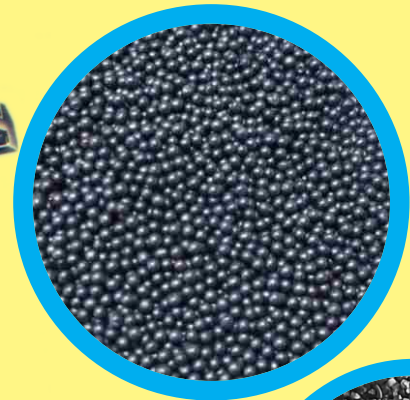

D A ENGINEERING INDUSTRIES

- **Manufacturers of Shot Blasting Machineries**
- **Manufacturers of Dust Collecting Equipments**
- **Specialist In Endless Conveyor Belts**
- **Fully Conditioned Shots**
- **Cut Wire Shots**
- **Steel Shots**
- **Steel Grit**

**BLAST CLEANING
& SHOT PEENING
ABRASIVES**

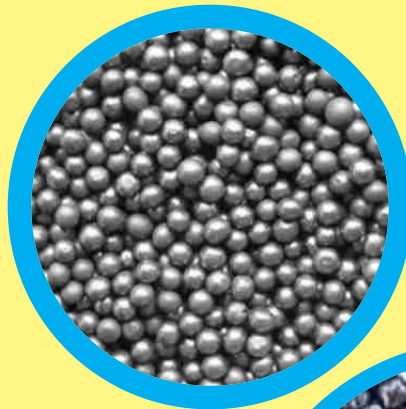



2 Cu. Ft. 20" x 27" TUMBLAST SHOT BLASTING MACHINE



2 Cu. Ft. 20" x 27" TUMBLAST SHOT BLASTING MACHINE WITH DUST COLLECTOR



DUST COLLECTOR




2 Cu. Ft. 20" x 27" TUMBLAST SHOT BLASTING MACHINE




3 Cu. Ft. TUMBLAST SHOT BLASTING MACHINE






3 Cu. Ft. TUMBLAST SHOT BLASTING MACHINE

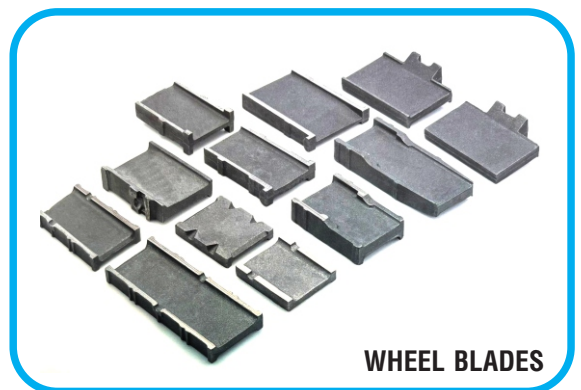

WHEEL BLADES

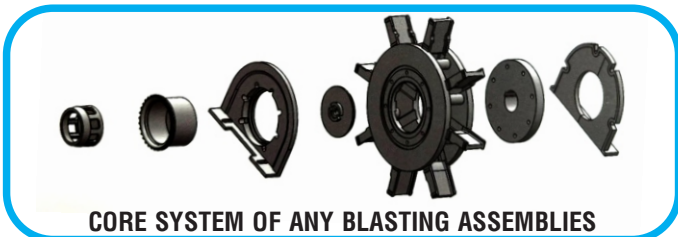

CORE SYSTEM OF ANY BLASTING ASSEMBLIES






5 Cu. Ft. 27" X 36"
TUMBLAST SHOT BLASTING MACHINE



5 Cu. Ft. 27" X 36"
TUMBLAST SHOT BLASTING MACHINE

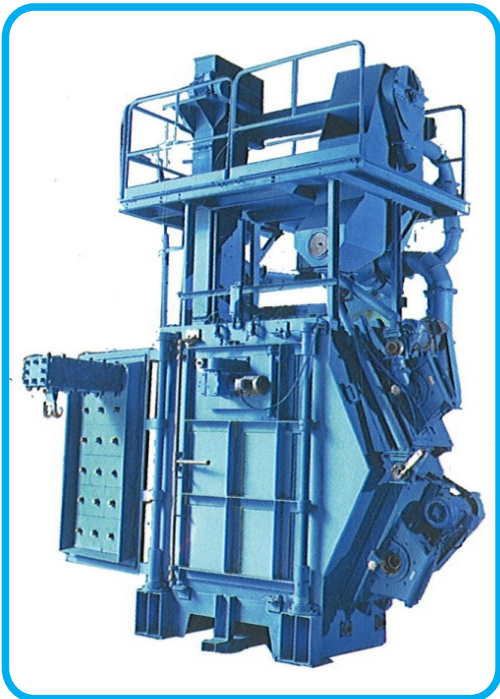




DOOR TYPE SPINNER HANGER



T-TYPE SPINNER HANGER



Y-TYPE SPINNER HANGER

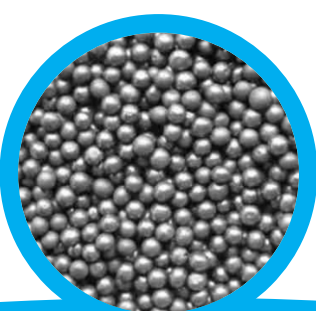

Steel Shot

Steel Shots	Shots size in mm	Carbon	Manganese	Silicon	Sulphur	Phosphorus	No of Cycle	Hardness
S170	0.425	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S230	0.6	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S280	0.7	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S330	0.81	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S390	1.0	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S460	1.2	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S550	1.4	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC
S660	1.6	0.85-1.2%	0.6-1.0%	0.4-1.2%	<0.05%	<=0.05	2800-2900	45-50HRC

Fully Conditioned Shots




Carbon	Maganese	Silicon	Sulphur	Phosphorus	Chromium	Nickel	No of Cycle	Hardness
0.80%	0.55%	0.33%	0.016%	0.018%	<0.10%	<0.10%	3300-3500	53-58HRC

Steel Grit GH 18

Size	Carbon	Manganese	Silicon	Sulphur	Phosphorus	Density	No of Cycle	Hardness
1.2mm	0.85-1.2%	0.60-1.2%	0.40-1.2%	<=0.05%	<=0.05%	7.4g/cm3	2400-2800	60-67HRC

Steel Grit GH 25

Size	Carbon	Manganese	Silicon	Sulphur	Phosphorus	Density	No of Cycle	Hardness
1.0mm	0.85-1.2%	0.60-1.2%	0.40-1.2%	<=0.05%	<=0.05%	7.4g/cm3	2400-2800	60-67HRC

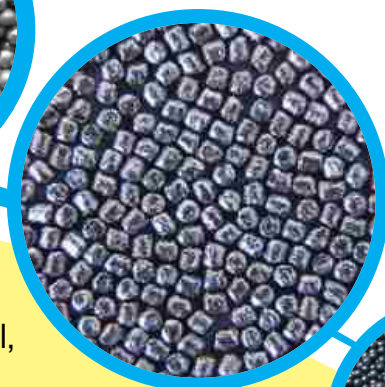

DA ENGINEERING INDUSTRIES

Office : Plot No.12-A, 5th Street, Thiruvallur Nagar, Thirumullaivoyal, Chennai - 600 062.

Unit-I : No.58-B, North Phase, 8th Street, SIDCO Industrial Estate, Ambattur, Chennai - 600 098.

Unit-II : S-62-A, Sidco Industrial Estate, Kakkalur, Thiruvallur - 602 003.

Email: daenggindustries@gmail.com | daenggmarketing@gmail.com

Web: www.daengineeringindustries.com

Mob: +91 98848 43117